

# Ad Hoc Networks

## Physical Backgrounds

## Physics of Electro-magnetic Waves

- **Frequency  $f$**  : number of oscillations per second
  - unit of measurement : **Hertz**
  - **wave length  $\lambda$** : distance (in meters) between wave maxima
  - The propagation speed of waves in vacuum is constant:  
speed of light  $c \approx 3 \cdot 10^8$  m/s

- Note that:

$$\lambda \cdot f = c$$


# Amplitude Representation

- Amplitude representation of a sinus curve


- $s(t) = A \sin(2\pi f t + \varphi)$

- A: amplitude                       $\varphi$ : phase shift

- f: frequency = 1/T              T: period

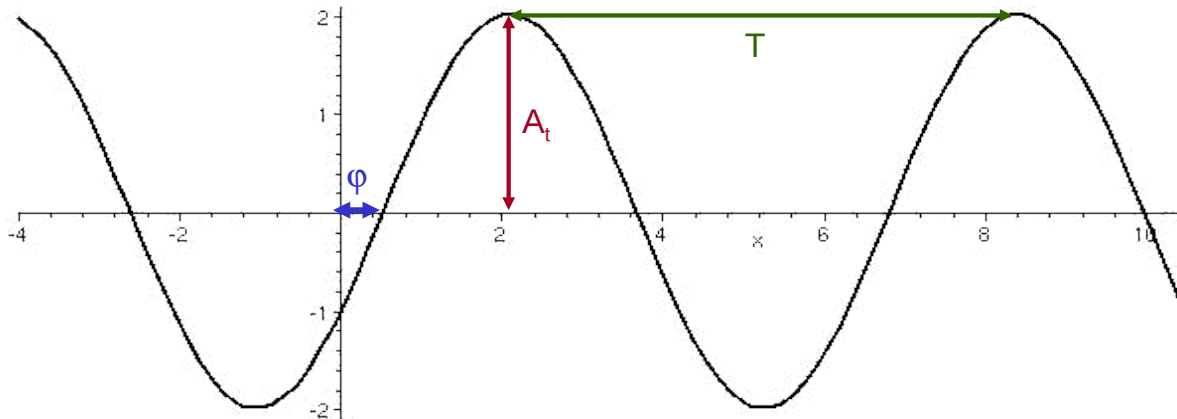


# Frequency Bands

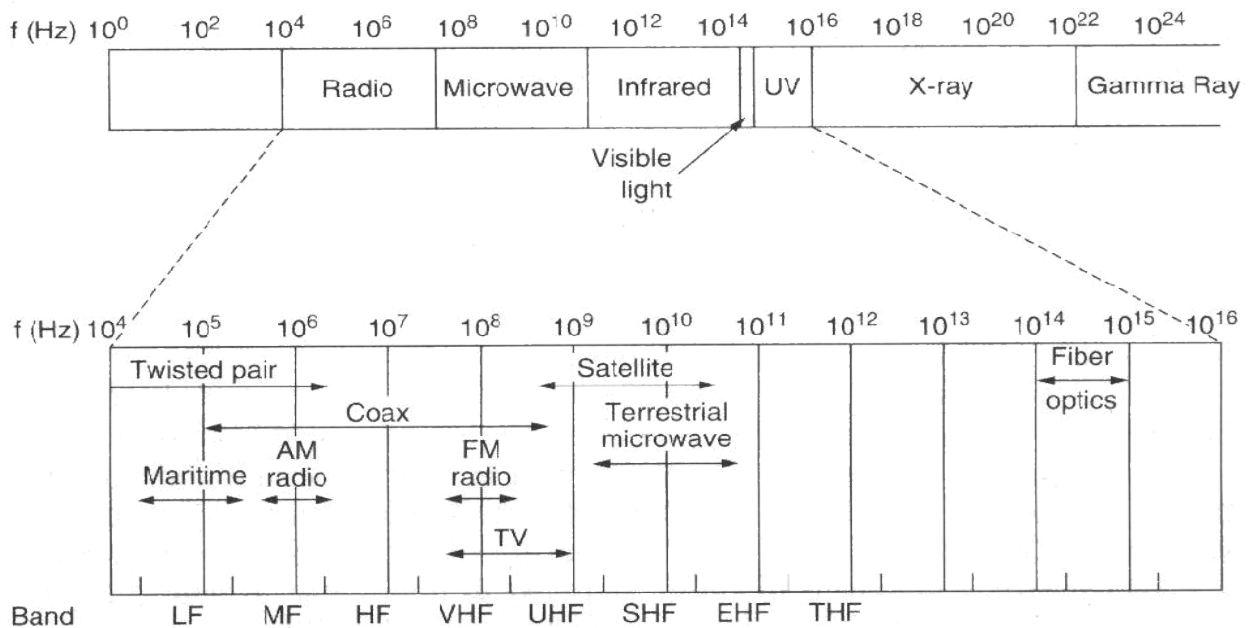

<b>LF</b>	<b>Low Frequency</b>	<b>MF</b>	<b>Medium Freq.</b>	<b>HF</b>	<b>High Freq.</b>	<b>VHF</b>
	<b>Very High Freq.</b>	<b>UHF</b>	<b>Ultra High F.</b>	<b>SHF</b>	<b>Super High Fr.</b>	
<b>EHF</b>	<b>Extra High Frequency</b>			<b>UV</b>	<b>Ultra Violet</b>	

# Different Frequencies – Attenuation

- **Attenuation** depends on the used frequency
- Can result in a frequency-selective channel
  - if bandwidth spans frequency ranges with different attenuation properties

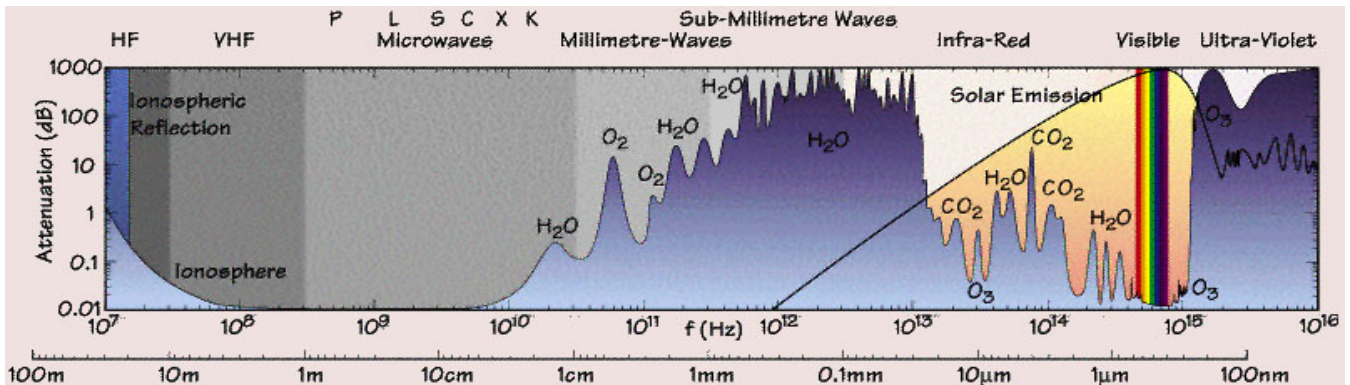

[http://www.geographie.uni-muenchen.de/iggf/Multimedia/Klimatologie/physik\\_arbeit.htm](http://www.geographie.uni-muenchen.de/iggf/Multimedia/Klimatologie/physik_arbeit.htm)

# Noise and Interference

- If we assume just one transmission:
  - The only disturbing effect is the self-interference: the signal arrives in multiple paths (multi-path fading)
- More disturbing effects in practice:
  - **Noise** – due to effects in receiver electronics, depends on temperature
    - Typical model: an additive Gaussian variable, mean 0, no correlation in time
  - **Interference** – from third parties
    - Co-channel interference: another sender uses the same spectrum
    - Adjacent-channel interference: another sender uses some other part of the radio spectrum, but receiver filters are not good enough to fully suppress it
- Received signal is distorted by channel, corrupted by noise and interference

# Signal to Interference and Noise Ratio (SINR)


- Receiving-power = Transmission-power · path-loss
  - path loss  $\sim 1/r^\beta$
  - $\beta \in [2,5]$
- Signal to Interference + Noise Ratio = SINR
  - S = receiving power from desired sender
  - I = receiving power from interfering senders
  - N = other interfering signals (e.g. noise)
- Necessary for recognizing the signal:

$$SINR = \frac{S}{I + N} \geq Threshold$$

## Symbols and Bit Errors

- Extracting symbols out of a distorted/corrupted waves can cause errors
  - Depends essentially on strength of the received signal compared to the corruption
  - Captured by **signal to noise and interference ratio (SINR)** given in decibel:

- SINR allows to compute  $SINR = 10 \log_{10} \left( \frac{P_{recv}}{N_0 + \sum_{i=1}^k I_i} \right)$  **bit error rate (BER)** for a given modulation
  - Also depends on data rate (# bits/symbol) of modulation

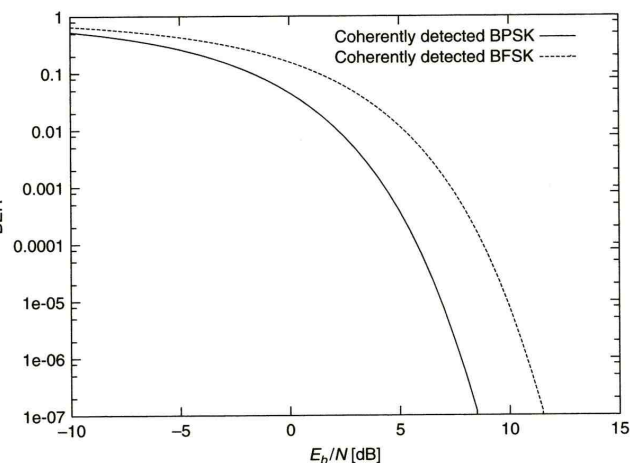


Bit error rate for coherently detected binary PSK and FSK

# Sharing the Medium

- Space-Multiplexing
  - Spatial distance
  - Directed antennae
- Frequency-Multiplexing
  - Assign different frequencies to the senders
- Time-Multiplexing
  - Use time slots for each sender
- Spread-spectrum communication
  - Direct Sequence Spread Spectrum (DSSS)
  - Frequency Hopping Spread Spectrum (FHSS)
- Code Division Multiplex


# Space Division Multiple Access in Cellular Networks

- Mobiles use closest base station
  - In an ideal situation it leads to a Voronoi diagram
- Directional antennae
  - Divide the area of each base station in smaller subsets
- Power Control
  - E.g. UMTS networks „breathe“,
  - i.e. base stations with large number of participants reduce the sending power
  - So, neighbored base stations can take over some of the mobile nodes of the overcrowded base station

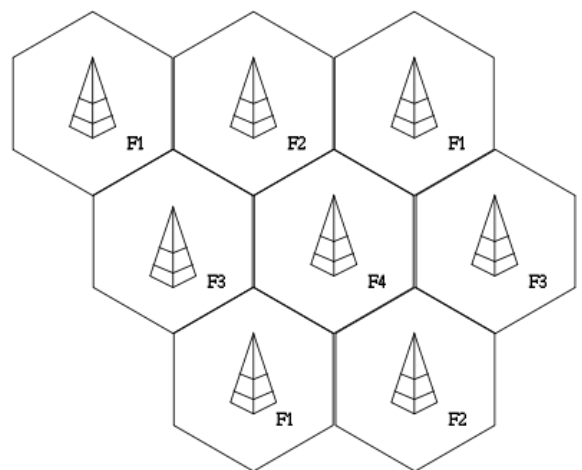


# Space Division Multiple Access in MANET

- Power Control of the sender
  - Possible use of multiple sending power
    - decreases the chance of interferences
    - Increases the maximum throughput for ad-hoc-networks
    - decreases the energy consumption
  - Possible to temporarily switching off
    - decreases energy consumption
- Directional Antenna
  - Increase the maximum throughput
  - Decrease energy consumption
  - Problematic for Medium Access

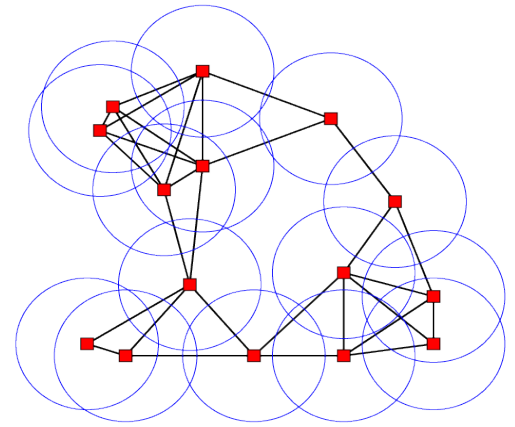


# Frequency Division Multiple Access (FDMA)

- Neighbored links or cells are using different frequencies
  - with sufficient distance
- Used in cellular networks like
  - GSM, UMTS
- Allocation
  - is a combinatorically hard problem (coloring problem - NP-hard)
  - static allocation for cellular networks
  - dynamic allocation necessary for mobile ad-hoc networks

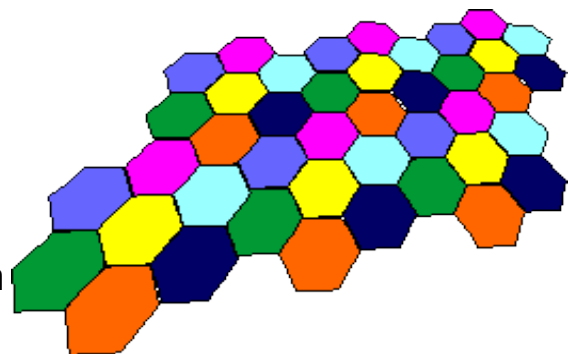

# Time Division Multiple Access (TDMA)

- Time slots are assigned to the participants
- Static or flexible assignment
- Features:
  - Single frequency can be shared with multiple users
  - Slots can be assigned on demand
- Used in
  - GSM, GPRS, UMTS,...

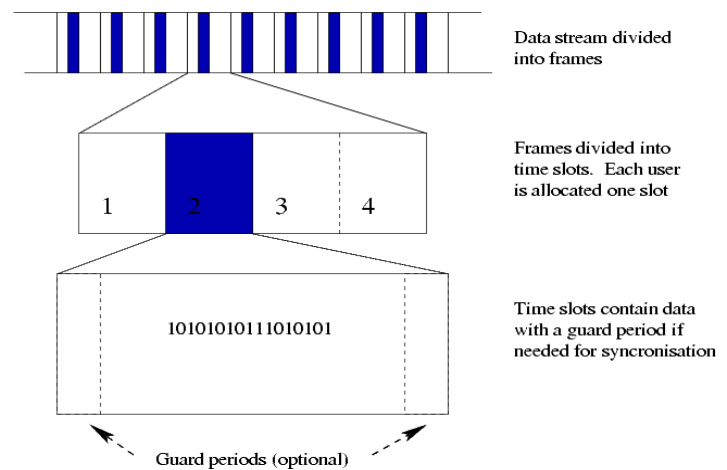

wikipedia.com

# Spread-Spectrum Communication: DSSS

- Direct Sequence Spread Spectrum (DSSS)
  - Transmitted signal takes up more bandwidth (frequencies)
  - It „spreads“ over the full „spectrum“ of frequencies
- Originally intended for military use to „jam“ all frequencies
- Phase Modulation with a pseudo-random code symbols
  - Collection of symbols, called chip, encode a bit

# Direct Sequence Spread Spectrum

- A Chip is a sequence of bits (given by  $\{-1, +1\}$ ) encoding a smaller set of symbols
  - E.g. Transform signal:  $0 = (+1,+1,-1)$ ,  $1=(-1,-1,+1)$

$$\begin{array}{cc} 0 & 1 \\ +1 & +1 & -1 & -1 & -1 & +1 \end{array}$$

- Decoding (Despreading):

- Compute inner product for bits  $c_i$  of the received signals  $s_i$  and the chips  $c_0 = -c_1$ :

$$\sum_{i=1}^m c_{0,i} s_i \qquad \sum_{i=1}^m c_{1,i} s_i$$

- When an overlay of the same, yet shifted, signals is received then the signal can be deconstructed by applying dedicated filters
- DSSS is used by GPS, WLAN, UMTS, ZigBee, Wireless USB based on an
  - Barker Code (11Bit):  $+1 +1 +1 -1 -1 -1 +1 -1 -1 +1 -1$
  - For all  $v < m$

$$\left| \sum_{i=1}^m a_j a_{j+v} \right| \leq 1$$

# Code Division Multiple Access (CDMA)

- Use chip sequence such that each sender  $i$  has a different chip  $C_i$  with
  - $C_i \in \{-1,+1\}^m$
  - $-C_i = (-C_{i,1}, -C_{i,2}, \dots, -C_{i,m})$
- For all  $i \neq j$  the normalized scalar product is 0:

$$C_i \bullet C_j = \frac{1}{m} C_i (C_j)^T = \frac{1}{m} \sum_{k=1}^m C_{i,k} C_{j,k} = 0.$$

- Sender  $i$  encodes bit 1 as  $C_i$  and bit 0 as  $-C_i$ .
- Assuming synchronized transmission, the receiver hears a linear combination of the senders transmissions.
- By multiplying with proper chip it can decode the message.



## CDMA (example)

- Example:
  - chip  $C_x = (+1,+1,+1,+1)$
  - chip  $C_y = (+1,+1,-1,-1)$
  - chip  $C_z = (+1,-1,+1,-1)$
- X sends 1, Y sends 0, Z sends nothing:
  - $V = C_x + (-C_y) = (0,0,2,2)$
- Decoding with the chip of X:  $V \cdot C_x = (0,0,2,2) \cdot (+1,+1,+1,+1) = 4/4 = 1$ 
  - Result: bit 1
- Decoding with the chip of Y:  $V \cdot C_y = (0,0,2,2) \cdot (+1,+1,-1,-1) = -4/4 = -1$ 
  - Result: bit 0
- Decoding with the chip of Z:  $V \cdot C_z = (0,0,2,2) \cdot (+1,-1,+1,-1) = 0$ 
  - Result: no signal.

## References

- Jie Wu (ed.) Handbook on Theoretical and Algorithmic Aspects of Sensor, Ad Hoc Networks and Peer-to-Peer Networks. *Auerbach*, 2005.
- Andrew S. Tanenbaum: Computer Networks. *4th edition, Prentice Hall*, 2003.
- [http://www.antd.nist.gov/wahn\\_home.shtml](http://www.antd.nist.gov/wahn_home.shtml)